

CPET FR Flame Retardant & RoHS Coverlay of Polyester with Adhesive


1. Description & Designation:

CPET FR product consists of PET film coating adhesive clad release film. It includes various types according to different thickness PET film, adhesive and release film utilized to meet the specific needs of customers.

Materials		Thickness	Supplier
Base film	Polyester film	1, 2, 3, 4 and 5 mils (0.025, 0.05, 0.075, 0.100, 0.125mm) etc.	TeijinD upont
Release Film	PP Film	2.0 mils (0.050mm) etc.	Toray of USA
Adhesive	Polyester adhesive	Translucence, Thickness 0.6 2 .0 mils (0.015 0.050mm) etc.	USA, Japan
	Color of adhesive	White etc.	

- Some special types appointed by customers can also be produced besides the common types listed in the above form.
- CPET FR product is identified by the following method:

C PET1 A(W)1 /PP -FR 500

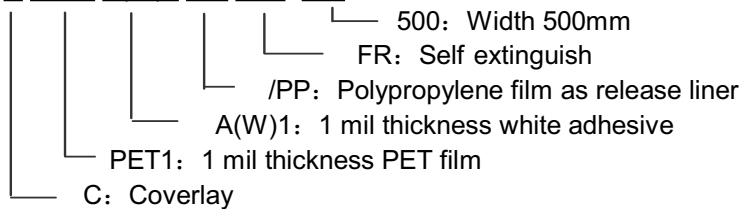

2. Features & Applications:

CPET FR products are widely used in flexible printed circuits board of PET film as coverlay with the following features.

- Meet the RoHS requirement and pass SGS certificate.
- Good bond strength and good chemical resistance.
- Excellent dimensional stability

3. Package

- Standard roll: 50+0.25 or 100+0.25 square meters per roll, maximum 2 splices and minimum 20m distance during two splices.
- Standard width: 500mm or 24 inches width except the customer's special instruction within the maximum width 24 inches.
- Inner diameter core: 6 inches (152mm) or 3 inches (76mm), packed in carton and outside wrapped with PE film.

4. Storage:

- Storage time: 12 months since production date; please use after inspection again passed for the materials over the storage time.
- Recommended storage condition: temperature 68 86? (about room Temp. and cool no needed), maximum relative humidity 75%.

**CPET FR Flame Retardant & RoHS Coverlay of Polyester with Adhesive
Data Sheet of Performance**

Property To Be Tested	Test Method	Typical Product Value CPET1A(W)1/PP FR
Peel strength, minimum, lb./in. width	Q000583	2.0
Tensile strength, minimum lb./in. ²	IPC TM 650 2.4.19	11,400
Elongation, minimum percent	IPC TM 650 2.4.19	60
Melt point of adhesive	Q000307	130 160°F
Flammability	IPC TM 650 2.3.8.1	Self extinguish
Adhesive Thickness	Q000463	0.025mm
Adhesive Appearance	By eye	Translucence
Dissipation factor, maximum (at 1 MHz)	IPC TM 650 2.5.5.3	0.015
Dielectric strength, minimum, volts/mil	ASTM D 149	300
Insulation resistance, minimum, megohms, room temperature	IPC TM 650 2.6.3.2	10 ⁵
Volatile content, maximum percentage,	IPC TM 650 2.3.37	2.0

Mark:

- (1) Recommended laminating cycle is 230 250°F for 3~5 minutes at 215 242 psi, and drying in oven of 185~200°F for 45~60 minutes after laminate.
- (2) Above data sheet are base on the typical products values. The final data for specific products supplied, please check the testing report attached with the shipment. These data are only for user's reference. The user should determine the suitability of JJFlex CPET FR materials for each application.